

Dual Balun (Shielded) CXR-75-Ohms-BNC-120-Ohms-RJ45

2 x BNC (F) (75 Ohms) to RJ-45 (F) 120 Ohms Converter

Product Overview

The Dual Balun converts 2 x BNC (F) (75 Ohms) to RJ-45 (F) 120 Ohms.

RJ-45 for E1 Interface

RJ-45 (Female) Pin #	Signal in RJ-45 (Female)
1	Tx Tip (Data Out)
2	Tx Ring (Data Out)
4	Rx Tip (Data In)
5	Rx Ring (Data In)

BNC Description

BNC	DTE BNC
Receive Input	Tip
Receive Ground	Ring
Transmit Output	Tip
Transmit Ground	Ring

Coaxial Connector (75 Ohm)

BNC	To IEC 169-8
-----	--------------

Environmental

Working Temp.	- 30C to 75C
---------------	--------------


RJ45 Connector

Type	Shielded 8 Position Contact
------	-----------------------------

Mounting Options

Double sided tape is provided to allow mounting onto any clean dry surface

Ordering Information



RJ-45 (Female)

Electrical

Matching Impedance	75 Ohms unbalanced coaxial to 120 Ohms balanced twisted pair
Bit Rates	2 Mbit/s and 8 Mbit/s as per G.703
Return Loss	2 Mbit/s exceeds G.703 (>25 dB from 52 KHz ~ 3072 KHz) and 8 Mbit/s as per G.703
Insertion Loss	< 0.16 dB for 2 Mbit/s service (51 KHz to 3072 KHz) < 0.3 dB for 8 Mbit/s service (211 KHz to 12.672 MHz)
Cross Talk	> 60 dB from 51 KHz to 12.672 MHz between two channels
Pulse Shape	2 Mbit/s and 8 Mbit/s as per G.703
Isolation Voltage	250 V DC between input and output
Signal Levels	2.37 V nominal peak voltage at 2Mbit/s and 8Mbit/s at the coaxial end as per G.703
EMC	EN50082-2 (CISPR 22) Class A for radiated emissions with UTP cable



Material

Enclosure	High Impact Polystyrol Colour Grey
Coax Connector	Brass Alloy As AS 1567 Type 385 Finish
Outer Contact/Body	Cu/Ni5b
Coax Connector Insulator	PTFE
Coax Connector Inner Contact	Phosphor Bronze Finish Cu/Ni
RJ45 Housing	1.25/Au 1.25
RJ45 Contacts	PBT Glass Filled, Black
RJ45 Shield	Phosphor Bronze Finish Ni/Au
	Bronze. Finish Ni

Product Description

Dual Balun (Shielded)
2 x BNC (F) (75 Ohms) to RJ-45 (F) 120 Ohms Converter

Drawing

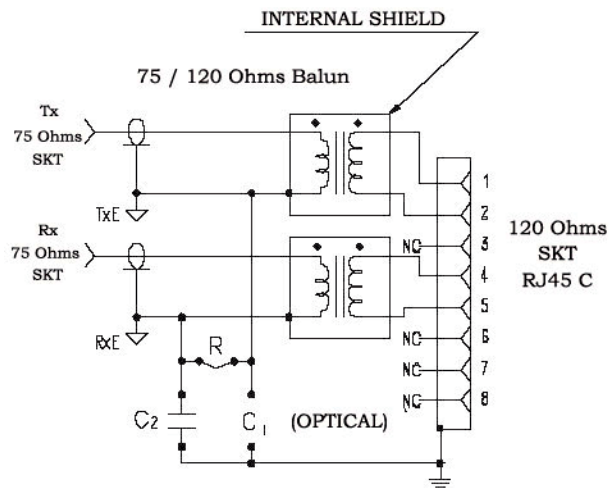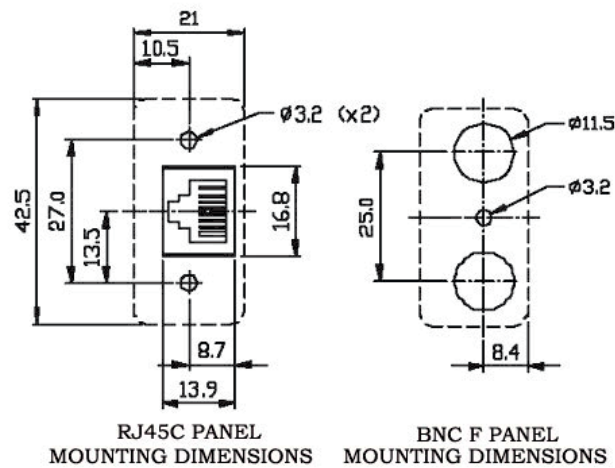

Note: (OPTIONAL EARTHING CONFIGURATION WITH R, C₁ & C₂)

