

V.35 / X.21 / V.36 / RS449 / EIA530 / RS232 INTERFACE CARD

Features

- Maximum data rate of $n \times 64K$
- ($n \leq 32$)
- Mapping to any sequential time slots
- Supports ANSI V.54
- Built-in BERT for diagnostics

DESCRIPTION

CXR-QX3440 V.35/V.36/EIA530/RS232/X.21 plug-in cards are a series of 4 different plug-in cards designed for the CXR-QX3440 series. They allow multiplexing of $n \times 64$ Kbps data to multiples of DS0 time slots onto a digital network.

An LED on the front panel of the CXR-QX3440 provides status indication.



ORDERING INFORMATION

To specify options, choose from the list below:

Model (RoHS compliant)	Description	Note
QX3440-6V35-DB25	6-channel V.35 plug-in modules with DB25S connector, for M34 please order conversion cable connector below. (2Mbits per channel)	For QX3440 and QX3440-S only
QX3440-6V36-DB25	6-channel V.36 card with DB25 connector via conversion cable to DB37	
QX3440-6EIA530-DB25	6-channel EIA530 card with DB25 connector	
QX3440-6RS449-DB34	6-channel EIA530/RS449 card with DB25 connector via conversion cable to DB37	
QX3440-6X21A-DB15	6-channel X.21/V.11 card with DB15 connector	
QX3440-5RS232	5-channel RS232 sync(up to 64K) /async (up to 19.2K) with X.50 substrate (up to 9.6K) plug-in module	

PRODUCT SPECIFICATIONS

DTE Interface Cards for CXR-QX3440 Series Product Specifications

Customer Equipment Interface (V.35)

Data Rate	56 or 64 Kbps *n ($n \leq 32$)	Connector	DB25S for V.35
Mapping	Any sequential time slots		

Customer Equipment Interface (V.36)

Data Rate	56 or 64 Kbps *n ($n \leq 32$)	Connector	DB25S for V.36
Mapping	Any sequential time slots		

Customer Equipment Interface (EIA530)

Data Rate	56 or 64 Kbps *n ($n \leq 32$)	Connector	DB25S for EIA530
Mapping	Any sequential time slots		

Customer Equipment Interface (RS232)

Data Rate	56 or 64 Kbps *n ($n=1 - 2$)	Connector	DB25S for RS232
Mapping	Any sequential time slots		

Customer Equipment Interface (RS449)

Data Rate	56 or 64 Kbps *n ($n \leq 32$)	Connector	DB25S for RS449
Mapping	Any sequential time slots		

Customer Equipment Interface (X.21)

Data Rate	56 or 64 Kbps *n ($n \leq 32$)	Connector	DB15S for X.21
Mapping	Any sequential time slots		

Smart Solutions for
Smart Networks


www.cxr.com



CXR Anderson Jacobson
Rue de l'Omette
28410 Abondant - France

T +33 (0) 237 62 87 90
F +33 (0) 237 62 88 01
email: contact@cxr.com

APPLICATION ILLUSTRATIONS

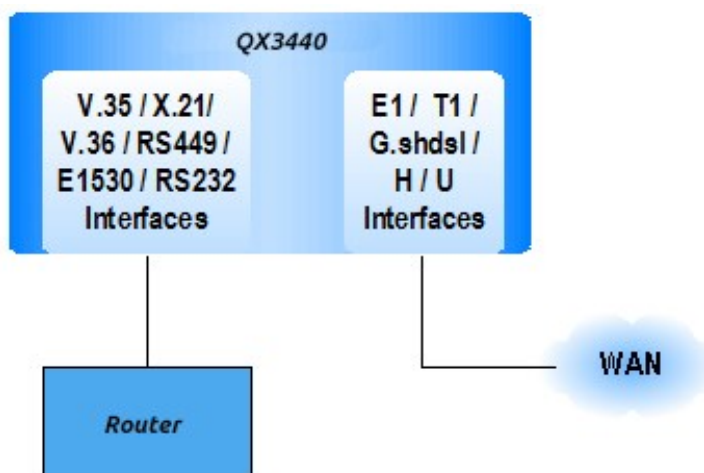

The information contained in this document are provided without warranty and do not constitute a contractual document. In order to improve its products, CXR reserves its right to modify, without notice, any part of this document and the specification it contains.