
Designed for Scaleable Growth

Z9 Series Network Cabinet



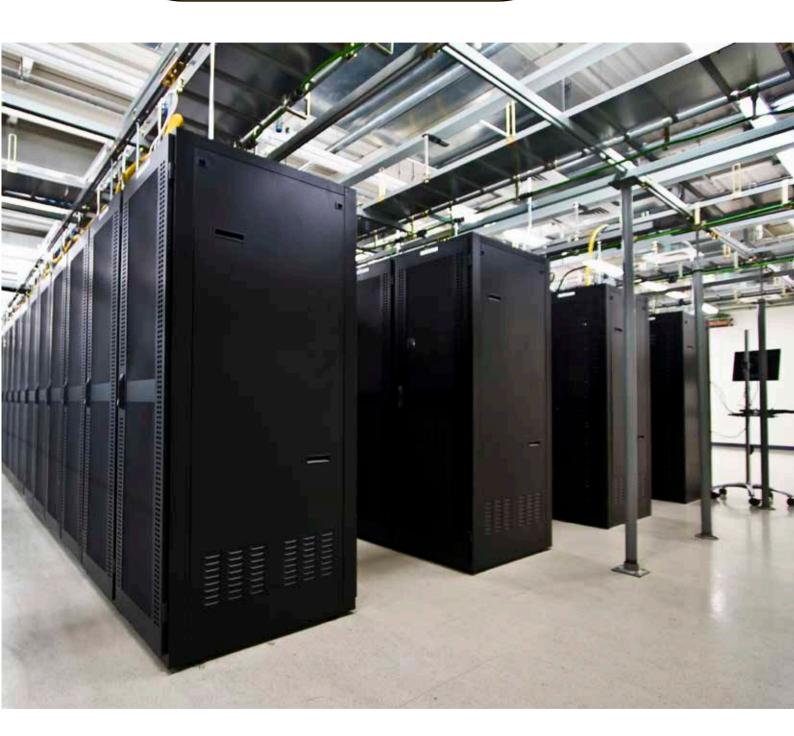


Z9 Series Network Cabinet

LongXing Z9 Series Network Cabinet solutions for advanced storage, cooling, power distribution, cable management and security in data centres and network rooms.

Designed to accommodate today's powerful computing hardware and scaleable to cater for emerging high end blade server and equipment technologies that are rapidly appearing over the horizon - the world and the data centre environment is changing and a new generation of rack solutions is born for this change - it is the Z9 Series.











T9-0606 600 24" 600 24" 540 21" 2382 94" 2 29-0608 600 24" 800 31" 740 29" 2382 94" 2 29-0609 600 24" 900 35" 840 33" 2382 94" 2 2 29-0610 600 24" 1000 39" 940 37" 2382 94" 2 2 29-0611 600 24" 1100 43" 1040 41" 2382 94" 2 2 2 29-0612 600 24" 1200 47" 1140 45" 2382 94" 2 2 2 29-0706 700 28" 600 24" 540 21" 2382 94" 2 2 2 2 2 2 2 2 2	,
T9-0606 600 24" 600 24" 540 21" 2382 94" 2 29-0608 600 24" 800 31" 740 29" 2382 94" 2 29-0609 600 24" 900 35" 840 33" 2382 94" 2 2 29-0610 600 24" 1000 39" 940 37" 2382 94" 2 2 29-0611 600 24" 1100 43" 1040 41" 2382 94" 2 2 2 29-0612 600 24" 1200 47" 1140 45" 2382 94" 2 2 2 29-0706 700 28" 600 24" 540 21" 2382 94" 2 2 2 2 2 2 2 2 2	Effective
### ATU This is a color of the process of the pr	nm inch
### ATU Told	272 89"
47U 29-0610 600 24" 1000 39" 940 37" 2382 94" 2 29-0611 600 24" 1100 43" 1040 41" 2382 94" 2 29-0612 600 24" 1200 47" 1140 45" 2382 94" 2 2 29-0706 700 28" 600 24" 540 21" 2382 94" 2 2 29-0708 700 28" 800 31" 740 29" 2382 94" 2 2 29-0710 700 28" 900 35" 840 33" 2382 94" 2 2 29-0711 700 28" 1000 39" 940 37" 2382 94" 2 2 2 2 2 2 2 2 2	272 89"
47U Z9-0611 600 24" 1100 43" 1040 41" 2382 94" 2 Z9-0612 600 24" 1200 47" 1140 45" 2382 94" 2 Z9-0706 700 28" 600 24" 540 21" 2382 94" 2 Z9-0708 700 28" 800 31" 740 29" 2382 94" 2 Z9-0709 700 28" 900 35" 840 33" 2382 94" 2 Z9-0710 700 28" 1000 39" 940 37" 2382 94" 2 Z9-0711 700 28" 1200 47" 1140 45" 2382 94" 2 Z9-0806 800 31" 600 24" 540 21" 2382 94" 2 Z9-0808 800 31" 900 35" 840 33"	272 89"
47U Z9-0612 600 24" 1200 47" 1140 45" 2382 94" 2 Z9-0706 700 28" 600 24" 540 21" 2382 94" 2 Z9-0708 700 28" 800 31" 740 29" 2382 94" 2 Z9-0709 700 28" 900 35" 840 33" 2382 94" 2 Z9-0710 700 28" 1000 39" 940 37" 2382 94" 2 Z9-0711 700 28" 1100 43" 1040 41" 2382 94" 2 Z9-0812 700 28" 1200 47" 1140 45" 2382 94" 2 Z9-0806 800 31" 800 31" 740 29" 2382 94" 2 Z9-0809 800 31" 1000 39" 940 37"	272 89"
47U Z9-0706 700 28" 600 24" 540 21" 2382 94" 2 Z9-0708 700 28" 800 31" 740 29" 2382 94" 2 Z9-0709 700 28" 900 35" 840 33" 2382 94" 2 Z9-0710 700 28" 1000 39" 940 37" 2382 94" 2 Z9-0711 700 28" 1100 43" 1040 41" 2382 94" 2 Z9-0712 700 28" 1200 47" 1140 45" 2382 94" 2 Z9-0806 800 31" 800 31" 740 29" 2382 94" 2 Z9-0808 800 31" 900 35" 840 33" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37"	272 89"
47U Z9-0708 700 28" 800 31" 740 29" 2382 94" 2 Z9-0709 700 28" 900 35" 840 33" 2382 94" 2 Z9-0710 700 28" 1000 39" 940 37" 2382 94" 2 Z9-0711 700 28" 1100 43" 1040 41" 2382 94" 2 Z9-0712 700 28" 1200 47" 1140 45" 2382 94" 2 Z9-0806 800 31" 600 24" 540 21" 2382 94" 2 Z9-0808 800 31" 800 31" 740 29" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0812 800 31" 1100 43" 1040 41"	272 89"
47U Z9-0709 700 28" 900 35" 840 33" 2382 94" 2 Z9-0710 700 28" 1000 39" 940 37" 2382 94" 2 Z9-0711 700 28" 1100 43" 1040 41" 2382 94" 2 Z9-0712 700 28" 1200 47" 1140 45" 2382 94" 2 Z9-0806 800 31" 600 24" 540 21" 2382 94" 2 Z9-0808 800 31" 800 31" 740 29" 2382 94" 2 Z9-0809 800 31" 900 35" 840 33" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0812 800 31" 1200 47" 1140 45"	272 89"
29-0710 700 28" 1000 39" 940 37" 2382 94" 2 29-0711 700 28" 1100 43" 1040 41" 2382 94" 2 29-0712 700 28" 1200 47" 1140 45" 2382 94" 2 29-0806 800 31" 600 24" 540 21" 2382 94" 2 29-0808 800 31" 800 31" 740 29" 2382 94" 2 29-0809 800 31" 900 35" 840 33" 2382 94" 2 29-0810 800 31" 1000 39" 940 37" 2382 94" 2 29-0811 800 31" 1100 43" 1040 41" 2382 94" 2 29-0812 800 31" 1200 47" 1140 45" 2382 </th <td>272 89"</td>	272 89"
Z9-0710 700 28" 1000 39" 940 37" 2382 94" 2 Z9-0711 700 28" 1100 43" 1040 41" 2382 94" 2 Z9-0712 700 28" 1200 47" 1140 45" 2382 94" 2 Z9-0806 800 31" 600 24" 540 21" 2382 94" 2 Z9-0808 800 31" 800 31" 740 29" 2382 94" 2 Z9-0809 800 31" 900 35" 840 33" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0811 800 31" 1100 43" 1040 41" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 <td>272 89"</td>	272 89"
Z9-0712 700 28" 1200 47" 1140 45" 2382 94" 2 Z9-0806 800 31" 600 24" 540 21" 2382 94" 2 Z9-0808 800 31" 800 31" 740 29" 2382 94" 2 Z9-0809 800 31" 900 35" 840 33" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0811 800 31" 1100 43" 1040 41" 2382 94" 2 Z9-0812 800 31" 1200 47" 1140 45" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160	272 89"
Z9-0806 800 31" 600 24" 540 21" 2382 94" 2 Z9-0808 800 31" 800 31" 740 29" 2382 94" 2 Z9-0809 800 31" 900 35" 840 33" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0811 800 31" 1100 43" 1040 41" 2382 94" 2 Z9-0812 800 31" 1200 47" 1140 45" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
Z9-0808 800 31" 800 31" 740 29" 2382 94" 2 Z9-0809 800 31" 900 35" 840 33" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0811 800 31" 1100 43" 1040 41" 2382 94" 2 Z9-0812 800 31" 1200 47" 1140 45" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
Z9-0809 800 31" 900 35" 840 33" 2382 94" 2 Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0811 800 31" 1100 43" 1040 41" 2382 94" 2 Z9-0812 800 31" 1200 47" 1140 45" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
Z9-0810 800 31" 1000 39" 940 37" 2382 94" 2 Z9-0811 800 31" 1100 43" 1040 41" 2382 94" 2 Z9-0812 800 31" 1200 47" 1140 45" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
Z9-0811 800 31" 1100 43" 1040 41" 2382 94" 2 Z9-0812 800 31" 1200 47" 1140 45" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
Z9-0812 800 31" 1200 47" 1140 45" 2382 94" 2 Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
Z9-0606 600 24" 600 24" 540 21" 2160 85" 2 Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
Z9-0608 600 24" 800 31" 740 29" 2160 85" 2	272 89"
	050 81"
70,0000 600 24" 000 25" 940 22" 2400 05" 0	050 81"
Z9-0609 600 24" 900 35" 840 33" 2160 85" 2	050 81"
Z9-0610 600 24" 1000 39" 940 37" 2160 85" 2	050 81"
Z9-0611 600 24" 1100 43" 1040 41" 2160 85" 2	050 81"
Z9-0612 600 24" 1200 47" 1140 45" 2160 85" 2	050 81"
Z9-0706 700 28" 600 24" 540 21" 2160 85" 2	050 81"
Z9-0708 700 28" 800 31" 740 29" 2160 85" 2	050 81"
Z9-0709 700 28" 900 35" 840 33" 2160 85" 2	050 81"
42U Z9-0710 700 28" 1000 39" 940 37" 2160 85" 2	050 81"
Z9-0711 700 28" 1100 43" 1040 41" 2160 85" 2	050 81"
Z9-0712 700 28" 1200 47" 1140 45" 2160 85" 2	050 81"
Z9-0806 800 31" 600 24" 540 21" 2160 85" 2	050 81"
	050 81"
	050 81"
	050 81"
	050 81"
	272 89"
	000 24"
	300 31"
	600 24"

Overall Height: w/ castors Effective Height:w/o castors





Compatibility



DELL ™

PowerEdge™ Server (2600 shown)

HP ™
Proliant™ Server
(DL380 G3 shown)







IBM [™] xSeries[™] (x305 shown)



All brand names, logo and registered trademarks are properties of their respective owners.

Manufacturer	Series
Apple™	Xserve G5 [™]
Apple™	Xserve RAID™
DELL™	PowerEdge™
HP [®]	ProLiant™
HP [®]	Integrity™
IBM [®]	BladeCenter®
IBM [®]	eServer® Cluster
Sun™	Sun Fire™
Sun™	Sun Fire Blade [™]





Universal Storage


The Z9 Series rack provides an ideal equipment cabinet environment, designed around universal standards, for the compatible mounting of both OEM manufactured servers, from leading vendors such as IBM, HP, DELL and SUN, as well as all 19"rack mountable solutions.

While the Emerging technology of Blade servers cards allows for very high density computing power within a single rack it becomes mission critical to ensure that the enclosure is specifically designed to dissipate the additional heat generated and manage the increased power and cable requirements – the Z9 series is engineered to provide flexibility whilst maximizing your investment protection in both your technology and more critically your data storage.

Structure



Critical Advanced Cooling

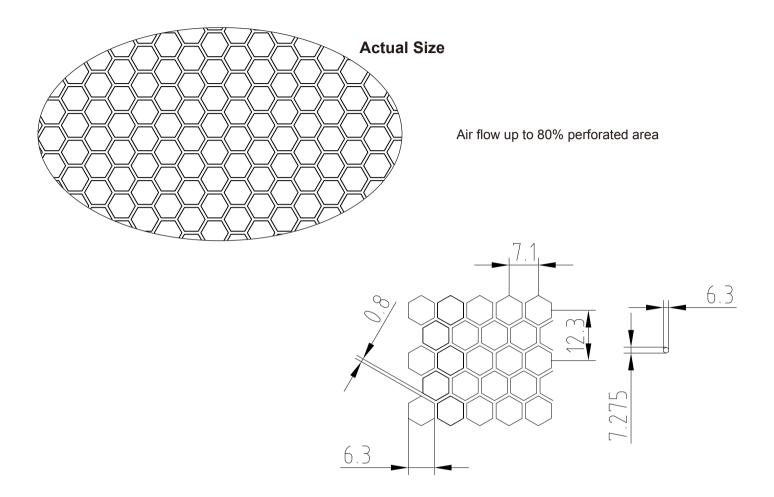


Nowadays cooling is a critical concern due to the increasing density of high end or blade type servers. Conventional cooling technologies and traditional style cabinets are no longer sufficient to stand up to such challenge.

LongXing Z9 Series is designed and engineered, whilst providing absolute user flexibility, to meet these emerging thermal challenges.

One of the outstanding designs of Z9 series is offering up to 80% perforated areas which ensures the ultimate in air pattern and flow. Optional fans and custom designed cabinets cladding for the Z9 series are also available. All these cooling solution designs meet or exceed most major products in the market for air flow.



Unit MarkingsLocated on mounting angles for easy installation of equipment




Hexagon Perforated Holes filled every fully perforated doors and assure optimal air flow.

Cooling

Optional fans for extra cooling

Air Flow Route With Flow Air Conditioner

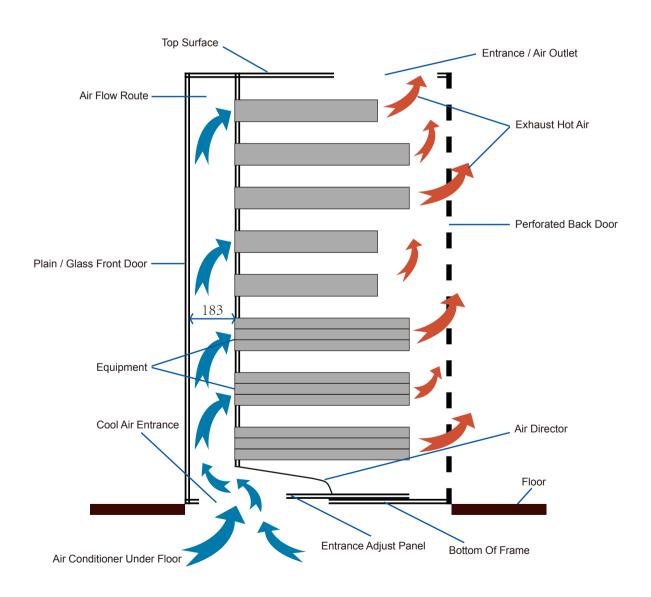



Efficient Cable Management


In today's data centres, the use of cabinets not specifically designed for high density equipment applications can lead to unsightly, often incorrectly installed or improperly managed cables – in the worst case this can affect data throughput as well as causing maintenance and thermal problems by blocking proper air flow.





Cable Management Panel

Installation

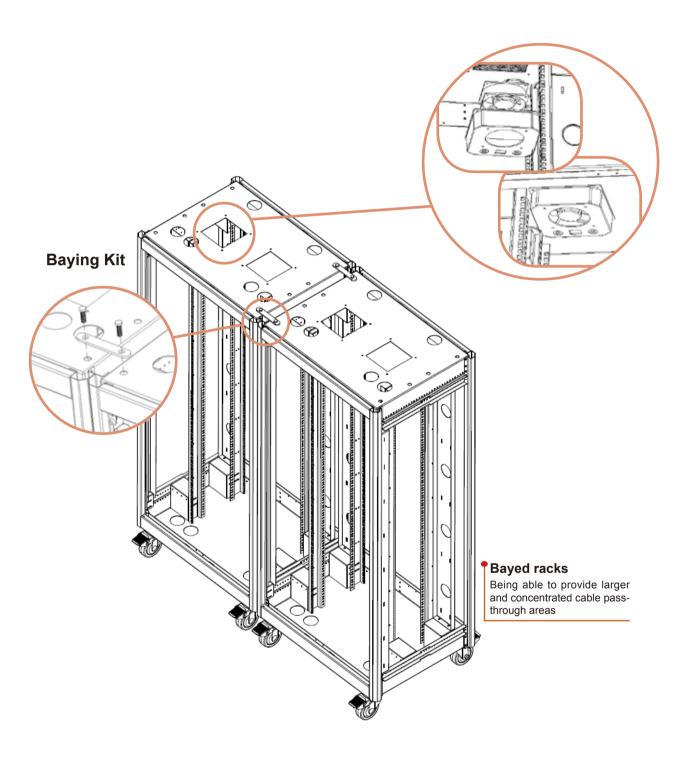



Creating a Safe Environment



Safety

Safety is a key concern for cabinets and data centre environments. The Z9 series provides high end structural stability, tested through sequential loading, to ensure it provides a safe working environment. For ease of installation and transport the Z9 series has heavy duty rate castors and is static load rated to 1,000kg.





Heavy Duty Door Hinge Door swings open up to 120°



Packages & Packing

4 package options available Standard Package — Full Set • Package A — Basic Frame ■ Package B — Basic Frame + Doors Package C — Basic Frame + Side Panels

Package Options



Standard Package



Package A w/o doors & side panels




Package B w/o side panels






Package C w/o doors

Packing Form









Assembly Packing with Wooden Case and Pallet

- •Assembly and flat packing available
- Ideal for overseas transportation
- •Better safety and protection can be provided





Smart solutions for smart networks



CXR ANDERSON JACOBSON

Rue de l'Ornette 28410 ABONDANT - FRANCE T +33 (0) 2 37 62 87 90 F +33 (0) 2 37 62 88 01

@mail:contact@cxr.com