

SWD-H-8TX-1TG-1GSF

INDUSTRIAL SWITCH



FEATURE

Plug and play,easy
to use

Simple and safe
device
maintenance

Standard DIN-rail
installation,conven
ient

Compact design
and easy to install

Product Overview

SWD-H-8TX- 1TG-1GSF unmanaged industrial switch, features excellent electromagnetic compatibility, anti-vibration and anti-shock ability , IP40 protection level, which enables the device to operate stably for a long time in a harsh environment. SWD-H-8TX- 1TG-1GSF offers dual-port uplink and supports fiber optic connectivity, making it suitable for various outdoor long- distance networking applications. Enclosed in a standard DIN-rail housing, it is plug-and-play and can easily integrate into diverse industrial communication network scenarios.

Product Characteristics

Ethernet lightning protection level: 6kv

DIN aluminum alloy shell,compact and convenient

Large butter,high-definition video stream without freezing

Low power consumption, fanless and noiseless

Supports normal,monitoring, isolation working modes

Appearance

P8 100M RJ45 ports+ 1 GE SFP port+ 1 GE RJ45 port


Dimension (W><D><H) : 138"108"44 mm

Product Specifications

SWD-H-STX-1TG-1GSF

Switching capacity	5.6Gbps
Port	8 100M RJ45 ports 1 GE SFP port 1 GE RJ45 port
Power Input	OC: 12-55V
Environment requirements	Operating temperature/humidity :-40°C-75°C, 10%-90% non-condensing Storage temperature/humidity: -40°C-85°C; 5%-95% non-condensing
MAC	Auto learning, auto aging
Switching mode	Store-and-forward
Cooling mode	Fanless, air cooling
Lightning protection	6KV

Structure

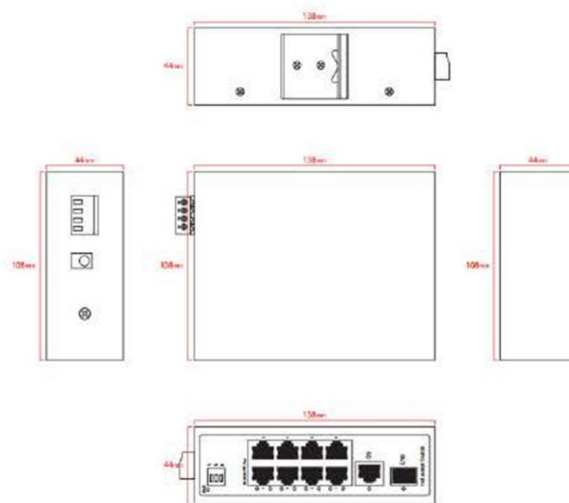

Ordering Information

SWD-H-8TX- 1TG-1GSF

8-port 100M RJ45 + 1-port GE SFP + 1-port RJ45 Unmanaged Industrial Switch, power operating temperature -40°C -75°C; 6KV lightning protection; IP40; DIN35-rail/wall-.mounting installation



CXR
T +33 (0) 237 62 87 90
www.cxr.com

17 Rue de l'Ornette 28410 Abondant France
contact@cxr.com