



# VCL-2724

## PRP HSR SWITCH

### Product Overview

VCL-2724 PRP / HSR Switch is a simple, compact, easy-to-use solution designed to be used in critical Ethernet networks that cannot afford packet loss which may otherwise occur during ring-recovery, or switchover upon failure of either one of the Ethernet LANs. The VCL-2724 is designed to carry critical Ethernet data over two parallel LANs with zero packet loss.

The VCL-2724 PRP / HSR Switch may also be used to carry Ethernet data in over an HSR ring with absolutely no packet loss. VCL-2724 PRP / HSR Switch is the only presently available in the industry which ensures that the PRP / HSR Switch never itself becomes a point of failure, even in power down condition.




- **In-built Electrical and Optical Ethernet Interface Options.** Provides both optical and electrical ethernet interface options on the “Protected side” as well as the “PRP sides”.
- **Ultra-Resilient and Failsafe\*** – Never itself becomes a point of failure in the electrical ethernet mode. The “protected interface” automatically reverts to and reconnects to the “primary PRP interface” even in a power down condition. It is the only such PRP solution available in the industry which ensures that the VCL-2724 PRP Switch, itself, never becomes a point of failure!!!
- **Applications include** critical Ethernet network applications such as Smart-Grid, electrical substation automation, industrial automation, aircraft controls, automotive applications and military communications.

### Features:


- Ruggedized construction. IEC 61850-3 Compliant. Suitable for industrial applications.
- Available in compact DIN Rail and 19-inch Rack Mount with 1+1 power supply options
- Total number of Ethernet Ports: 3
  - One Interlink Port: Input Ethernet Port (Optical / Electrical - User Selectable)
  - PRP/HSR #1: Protected Ethernet Port (Optical / Electrical - User Selectable)
  - PRP/HSR #2: Protected Ethernet Port (Optical / Electrical - User Selectable)
- Compliant with IEC 62439-3 specifications
- Zero recovery time and zero packet loss in case of the failure of either of the (parallel) transmission links. A single network fault will not result in any frame loss.
- Support IEEE-1588v2 Precision Time Protocol (PTP) transparent clock functionality.
- Network loop detection and removal
- Cut-through and store-and-forward operation.
- Quality of Services (QoS) with priority tagging packet filtering and four priority queues per port.

- Port-based VLAN, VLAN tagging - Max number VLANs is 4094
- Per port packet filtering
- Support for MAC address-based authentication methods.
- **Maintenance:** The network is fully operational even during maintenance as any intermediate network device (such as an Ethernet Switch) can be disconnected and replaced without breaking the network connectivity.
- **Applications include** critical network applications, smart-grid, electrical substation automation, industrial automation, critical automotive and military communication applications.
- **Failsafe\*:** In Electrical Ethernet Mode.


**Typical PRP Application Diagram:**

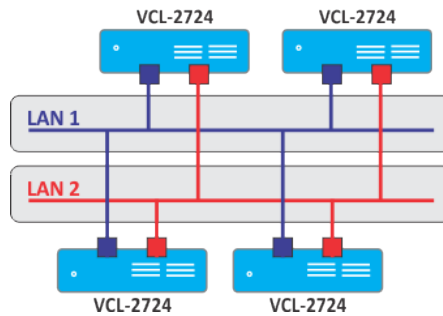

**Typical HSR Application Diagram:**

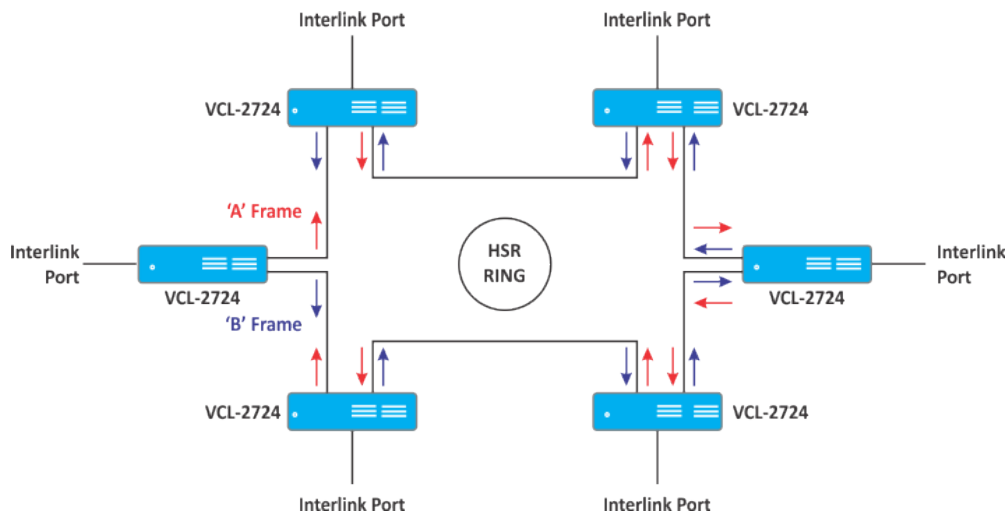


**Two VCL-2724 units interconnected by two parallel RSTP Rings ensure zero packet loss, failsafe transmission**

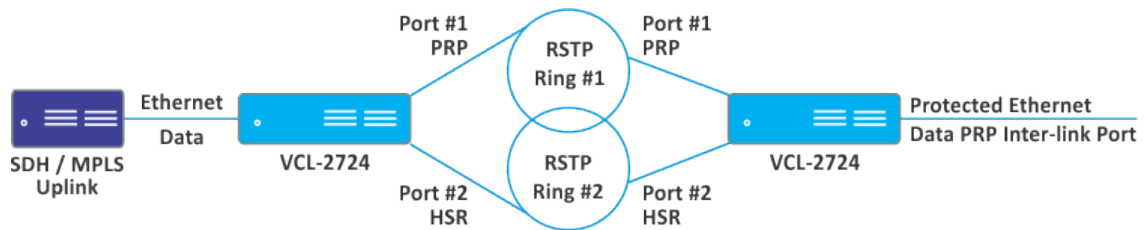

Two PRP/HSR units interconnected by two parallel RSTP rings ensure that data is transferred seamlessly with zero packet loss, even if one of the RSTP link in the LAN breaks / fails.

## Redundant Ethernet transmission over SDH links with zero packet loss.

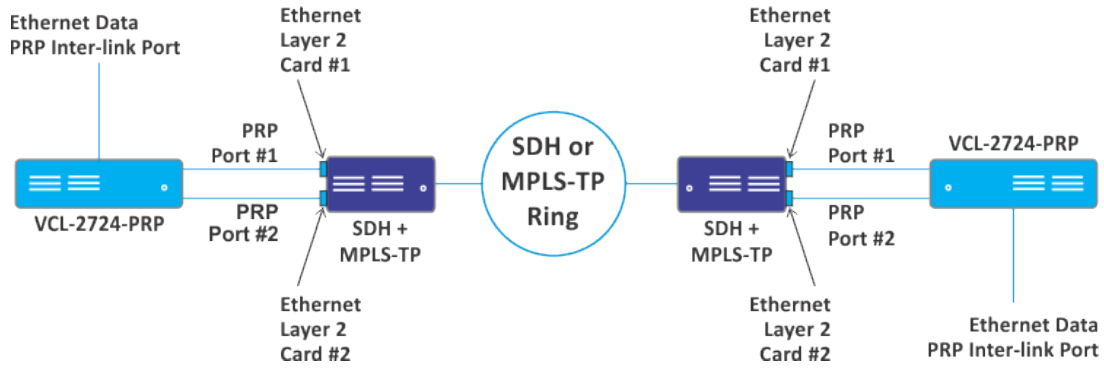

PRP/HSR units installed on either side of an SDH transmission equipment ensures that even in the event of the failure of any one of the Ethernet card / Ethernet port on either side of the transmission link, the Ethernet data shall continue to be transmitted seamlessly with zero packet loss between the two locations.

### Technical Specifications

#### Environmental

Operating Temperature	-20°C to +60°C
Maximum Operating Humidity	95% R.H., Non-Condensing
Maximum Operating Altitude	Up to 3,000 meters above sea Level
Operation	Complies with ETS 300 019 Class 3.2
Storage Temperature	-40C to +70C
Storage	Complies with ETS 300 019 Class 1.2
Maximum Storage Humidity	98% R.H., Non-Condensing
Maximum Storage Altitude	Up to 3,000 meters above sea level
Transportation	Complies with ETS 300 019 Class 2.3

#### EMI, EMC, Surge Withstand and other Compliances:

EN 50081-2	EN 50082-2	IEC 60068-2-29
IEC 61000-4-6 (Conducted Immunity)		IEC 60068-2-2
IEC 60068-2-78	IEC 60068-2-1	IEC 60068-2-14
CISPR 32 / EN55032 Class A (Conducted Emission and Radiated Emission)		
IS 9000 (Part II Sec. 1-4, Part III Sec. 1-5, Part IV, Part 14 Sec. 1-3)		
IEC 60870-2-1	IEC 61000-4-3	IEC 61000-4-2
IEC 61000-4-3 (Radiated Immunity)		IEC 61000-4-8
Telcordia GR-1089 Surge and Power Contact		IEC 61000-4-3

#### Electromagnetic Standards Compliance:

- EN 50081-2,
- EN 50082-2
- IEC 61000-6-2 (Immunity)
- IEC 61000-6-4 (Emission)
- Complies to IEEE and IEC standards

#### SFP Specifications

Compliance	<ul style="list-style-type: none"> <li>○ Compliant with IEEE 802.3z Fast Ethernet 1000BASE-LX</li> <li>○ MSA Compliant</li> <li>○ RoHS, EMI, ESD, DDM</li> </ul>
Safety	Class 1 Laser Safety / IEC-60825 Compliant
Bit Rate	1.25 Gbps / 1250 Mbps
Wavelength	1310 / 1550 nm

Distance	550m to 80Kms, as per order
Optical Connector	LC

**Best case estimated time for network recovery**

STP (Spanning Tree Protocol)	30 sec
RSTP (Rapid Spanning Tree Protocol)	4 sec. min.
PRP (Parallel Redundancy Protocol)	0ms
HSR (High-availability Seamless Redundancy)	0ms

**CE Compliance:**

- Low Voltage Directive 2014/35/EU
- Electromagnetic Compatibility 2014/30/EU

**Mechanical Specifications:**

- DIN Rail Mount
- H x W x D: 72.0mm x 190.0mm x 176.5mm
- Weight: 1.5 KG

**Power Consumption:**

- < 10 Watts

**Electrical Ethernet (OAM):**

- 1 x 10/100Base-T / Tx auto negotiation
- Compliant with IEEE 802.3

**Electrical Ethernet (Interlink and HSR/PRP Ports)\*\*:**

- 3 x Gigabit Ethernet Ports:
  - 1 x Input
  - 2 x PRP / HSR
- 10/100/1000M auto negotiation
- Compliant with IEEE 802.3, IEEE 802.3/u specifications

**Optical Ethernet (Interlink and HSR/PRP Ports):**

- Multi-rate
- 3 x 100Base-FX; or 1000Base-FX
- 3 x Optical Ethernet Ports:
  - 1 x Input
  - 2 x PRP / HSR
- Compliant with 100Base-FX/1000Base-FX Standards
- User selectable between 100Base-FX (Fast Ethernet) and 1000Base-FX (Gigabit Ethernet) modes
- Suitable for Single mode / Multi-mode fiber
- LED status for activity, link and power.

**Management Ports:**

- USB Serial Port
- Ethernet 10/100BaseT, RJ45

### Management option:

- CLI English Text Command
  - Over TCP/IP Telnet
  - Serial Communication
- Easy to use GUI
  - Over TCP/IP Telnet
  - Serial Communication

### Regulatory Compliances:

- RoHS, CE Marking
- Complies with FCC Part 68 and EMC FCC Part 15
- Telcordia GR-1089 Surge and Power Contact

### MTBF:

- Per MIL-HDBK-217F:  $\geq 37$  years @ 24C
- Per Telcordia SSR 332, Issue 1:  $\geq 42$  years @ 24C

### Ordering Information:

Part No.	Description
VCL-2724-DIN-DC018060	VCL-2724, PRP / HSR Switch DIN Rail Mount Version 1 x 18~60V DC (48V DC nominal) Power Supply Input 48V DC

### # Add Power Supply Option below (if AC or 125/250V DC operating voltage is required):

VCL-EMOD 0444-AC220	External Power Supply - DIN Rail Mount Power Supply (External) AC to DC Converter, DRL30-24-1, DIN Rail Mount: <ul style="list-style-type: none"><li>○ Input: 1 x AC Input [90~240V AC, 50/60Hz]</li><li>○ Output: 1 x DC Output [24V DC~1.25A, 30W]</li></ul>
VCL-EMOD 0444-DC220	External Power Supply - DIN Rail Mount Power Supply (External) DC to DC Converter, DRL30-24-1, DIN Rail Mount: <ul style="list-style-type: none"><li>○ Input: 1 x DC Input [110~250V DC]</li><li>○ Output: 1 x DC Output [24V DC~1.25A, 30W]</li></ul>



CXR  
T 02 37 62 87 90

[www.cxr.com](http://www.cxr.com)

Rue de l'Ornette 28410 Abondant France  
[contact@cxr.com](mailto:contact@cxr.com)

*Smart Solutions for Smart Networks*

Information contained in this document is not contractual. CXR improves its products continuously. Specifications may change without notice.