

# VCL-2750

Version 2.4

## IEEE-1588v2 PTP SLAVE PTP TO IRIG-B CONVERTER

### Introduction:

VCL-2750, PTP Slave Clock (DIN Rail Version) / PTP to IRIG-B Converter is a high precision, high reliability time and frequency synchronization solution which can be synchronized from a IEEE- 1588v2 PTP Grandmaster to provide frequency and time-of-day synchronization across a PTP network with nanosecond accuracy. Multiple 1PPS / IRIG-B Outputs are provided to synchronize local clock (time-of-day) to IEDs, as well as RTUs to a central timing source.



### Features and Highlights:

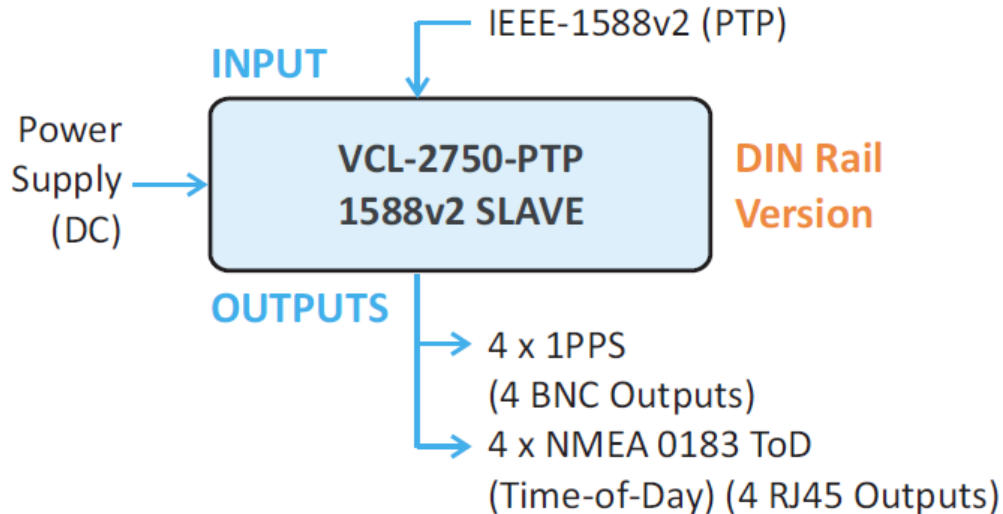
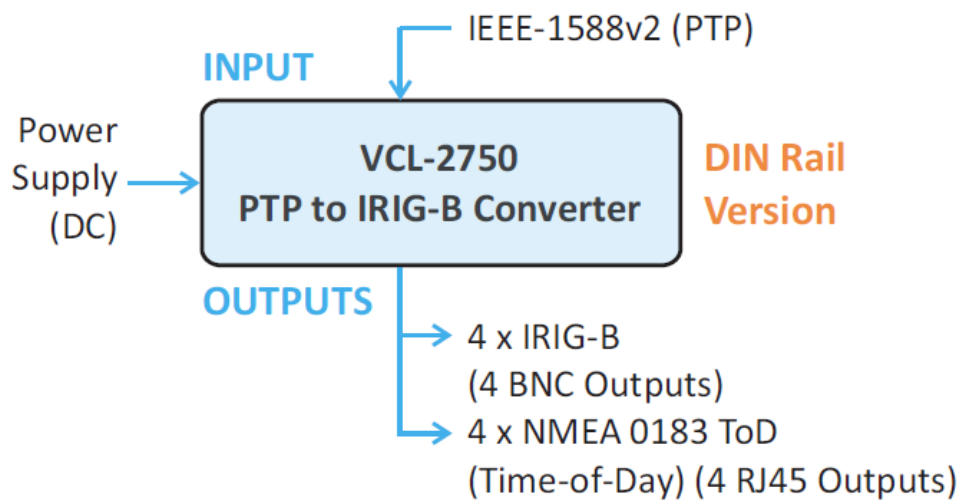
- PTP to IRIG-B Converter
- Reliable, Cost-Efficient Reference
- BMCA (Best Master Clock Algorithm) - allows the unit to be installed in a redundant PTP Grandmaster network
- 1 PPS / IRIG-B outputs (user configurable)
- < 1000ns accuracy
- Standard RJ45 and BNC connectors for all inputs and outputs ToD compliant to NMEA 0183 outputs (RJ45 Port).
- 1 x PTP Input (10/100BaseT Ethernet Slave Port)

### Management and Monitoring Ports:

- USB
- 1 x OAM (10/100BaseT Ethernet Port)
- 1 x External Alarm Relay Contact.

### Additional Features:

- Password Protection
- 48V DC and 24V DC power supply options
- Power Contact and Lightning Protection as per Telcordia GR- 1089-CORE.

**Application # 1: PTP 1588v2 Slave to 1PPS application****Application # 2: PTP 1588v2 Slave to IRIG-B Converter****Typical Synchronization Applications:**

- Synchronizing mobile communication networks such as UMTS, GPRS, HetNet, 2G, 3G, and 4G networks
- Wireless and Wireline Telecom synchronization Distributing Time (ToD) and Frequency reference for power utilities across all nodes of the network
- Synchronization of Defence Networks
- Synchronizing airports and aviation communications Synchronizing railway signaling networks and railway communications
- Synchronizing traffic management
- Broadcasting Network and Broadcast equipment synchronization.

**Time Inputs:**

Input Type	Connector
IEEE-1588v2 (PTP)	RJ45

**Standard Frequency and ToD Outputs:**

Output Type	Connector
4x1PPS or 4xIRIG-B Synchronized to PTP Grandmaster*	BNC
4 x TOD (Time-Of-Day) output compliant to NMEA0183	RJ45

**Note: User selectable between IRIG-B and 1PPS Outputs****IRIG-B Format**

IRIG-B	Format
Un-Modulated	B004

**Note: B122 (modulated signal is not supported)****Power Supply Options:**

Input DC Voltage	24V DC; 48V DC 110V DC or 220V DC (With external adaptor)
Full Load Current	< 0.5 A at 24V DC
Input Voltage Reversal Protection	Provided in the Card
Efficiency at Full Load	>96%

**System Access, Control and Management Options:**

- Telnet
- CLI Control Interface (HyperTerminal or VT100)
- SNMP V2 Traps (MIB File provided).
- Windows compatible GUI (Graphical User Interface)

**EMI, EMC, Surge Withstand and other Compliances:**

EN50081-2	EN50082-2	IEC 60068-2-29
IEC 61000-4-6 (Conducted Immunity)	IEC 60068-2-2	IEC 60068-2-78
IEC 60068-2-1	IEC 60068-2-14	IEC 60870-2-1
CISPR32 / EN55032 Class A (Conducted Emission and Radiated Emission)		
IS 9000 (Part II Sec. 1-4, Part III Sec. 1-5, Part IV, Part 14 Sec. 1-3)		
IEC 61000-4-5	IEC 61000-4-8	IEC 61000-4-2
IEC 61000-4-3 (Radiated Immunity)		IEC 61000-4-4

**Electromagnetic Standards Compliance:**

- EN50081-2, EN50082-2
- IEC 61000-6-2 (Immunity)
- IEC 61000-6-4 (Emission)
- Complies to IEEE and IEC standards

**CE Compliance:**

- Low Voltage Directive 2014/35/EU
- Electromagnetic Compatibility 2014/30/EU

**Other Regulatory Compliances:**

- RoHS
- CE Marking
- Complies with FCC Part 68 and EMC FCC Part 15



**Environmental:**

Operational	-20°C to +60°C (Typical: +25°C)
Cold Start	-10°C to +60°C
Storage	-40°C to +75°C
Humidity	95% non-condensing
Cooling	Convention Cooled. No cooling fans are required.

**Mechanical Specifications:**

Height	73 mm.
Depth	190 mm.
Width	190 mm.
Weight	1.5 kg.

**Ordering Information:**

Part #	Description
<b>VCL-2750-DIN</b>	<p>VCL-2750, PTP (IEEE-1588v2) Slave            PTP to 4 x IRIG-B / 4 x 1PPS Converter            DIN Rail version            Inputs:            - 1 x PTP IEEE-1588v2 from PTP Grandmaster            Outputs:            - 4 x IRIG-B (B004-Date, Month, Year Support) / 4 x 1PPS            - 4 x TOD compliant to NMEA,            Management: SNMP, Telnet (RJ45 (F) Port), Serial Port (USB), EMS, Graphical User Interface (GUI)</p> <p><b># Add Power Supply (24Vdc or 48Vdc)</b></p>

<b># Add Power Supply</b>	
<b>VCL-2750-DC012032</b>	1 x 12~32V DC (24V DC nominal) Power Supply Input
<b>VCL-2750-DC018060</b>	1 x 18~60V DC (48V DC nominal) Power Supply Input



**CXR**  
 T 02 37 62 87 90  
[www.cxr.com](http://www.cxr.com)

17 Rue de l'Ornette 28410 Abondant France  
[contact@cxr.com](mailto:contact@cxr.com)

*Smart Solutions for Smart Networks*

Information contained in this document is not contractual. CXR improves its products continuously. Specifications may change without notice.