

ACDC-48-35 SERIES

36W Switching Adapter

Features



- * Universal Input Range 90-264VAC
- * Meets EN55022 Class "B" and CISPR/FCC Class B, Conducted
- * Continuous Short Circuit Protection
- * Leakage Current 0.25mA Max.
- * Over Voltage Protection
- * Meet CoC V5 Tier 2 & DoE Level VI
- * (Output cable length \leq 1800mm)

- * No Load Power Consumption < 75mW



Ordering Information

ACDC-48-35W

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 1	VOLTAGE REGULATION NOTE 2	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	AVG. EFF.
ACDC-48-35W	48V	0.75A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	88.31%

Specifications

INPUT SPECIFICATIONS:

Voltage 90~264Vac
 Frequency 50 to 60Hz
 Inrush Current 60A max. @240Vac
 Leakage Current 0.25mA max.

OUTPUT SPECIFICATIONS:

Hold-up Time 8ms typ. @115Vac
 Short Circuit Protection Continuous(Auto Recover)
 Over Voltage ProtectionTVS Component to Clamp
 Temperature Coefficient ±0.05%/°C


GENERAL SPECIFICATIONS:

Isolation Input to output = 4,242VDC
 Operating Temperature -20 ~ 60°C (see derating curve)
 Storage Temperature -20~85°C
 Humidity 93% RH max. Non condensing
 Cooling Natural Convection
 Switching Frequency 67KHz typ.
 MTBF MIL-HDBK-217F, GB, at 25°C/115VAC 200Khrs min.
 Altitude 2000m
 Dimensions 4.370x2.008x0.886 inches (111.00x51.00x22.50mm)
 Weight 190g(0.42 Pounds)
 AC Inlet IEC320/C8

SAFETY AND EMC:

Emission and Immunity EN55022 Class B, FCC Part 15 Class B
 EN61000-6-3, EN61000-3-2, EN61000-3-3
 EN55024, EN61204-3, EN61000-6-1
 Safety Class II, IEC60950-1, EN60950-1, UL60950-1

ACDC-35W Series Derating Curve

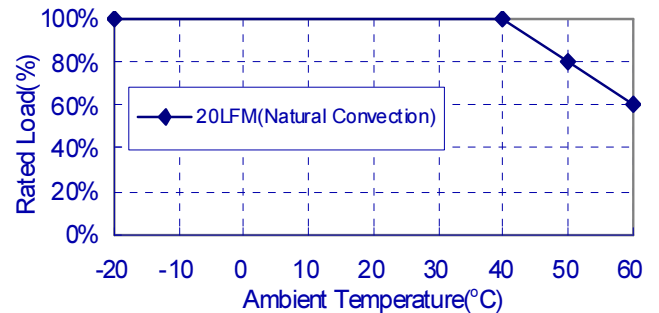


NOTE:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measurement @20MHz BW.
2. Voltage setpoint at 60% load.
3. Line regulation is measured from 100Vac to 240Vac full load.
4. Load regulation measured from 60% to 100% full load and from 60% to 20% load (60% +/- 40% full load).

Mechanical Specification

All Dimensions are in inches(mm)
 Tolerance:Inches:X.XXX±0.02
 Millimeters:X.XX±0.5

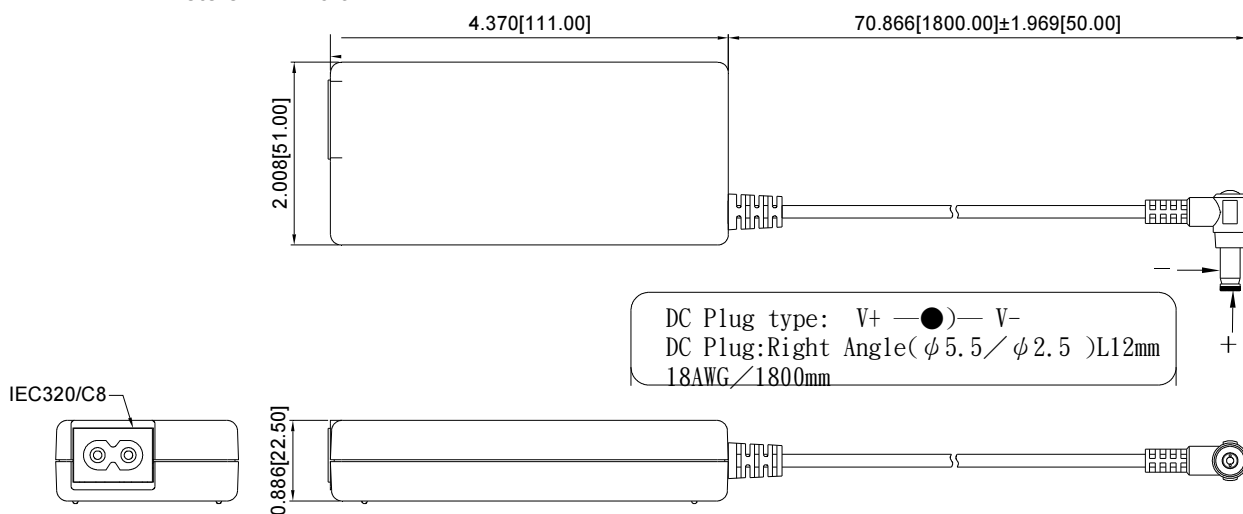

CXR Anderson Jacobson
 T +33 (0) 237 62 87 90
www.cxr-networks.com

17 Rue de l'Ornette 28410 Abondant France
contact@cxr.com